



REMOTE CONTROL

DESCRIPTION


Remote Control for KTS-MW3-12V-XX and KTS-PIR3-12V-XX Sensors | Used to set or adjust all sensor settings.



5 YEAR WARRANTY

SPECIFICATIONS

Catalog Number	Description
KTS-MW3-REMOTECONTROL	Remote Control for KTS-MW3-12V-XX and KTS-PIR3-12V-XX Sensors. Used to set/adjust all sensor settings.

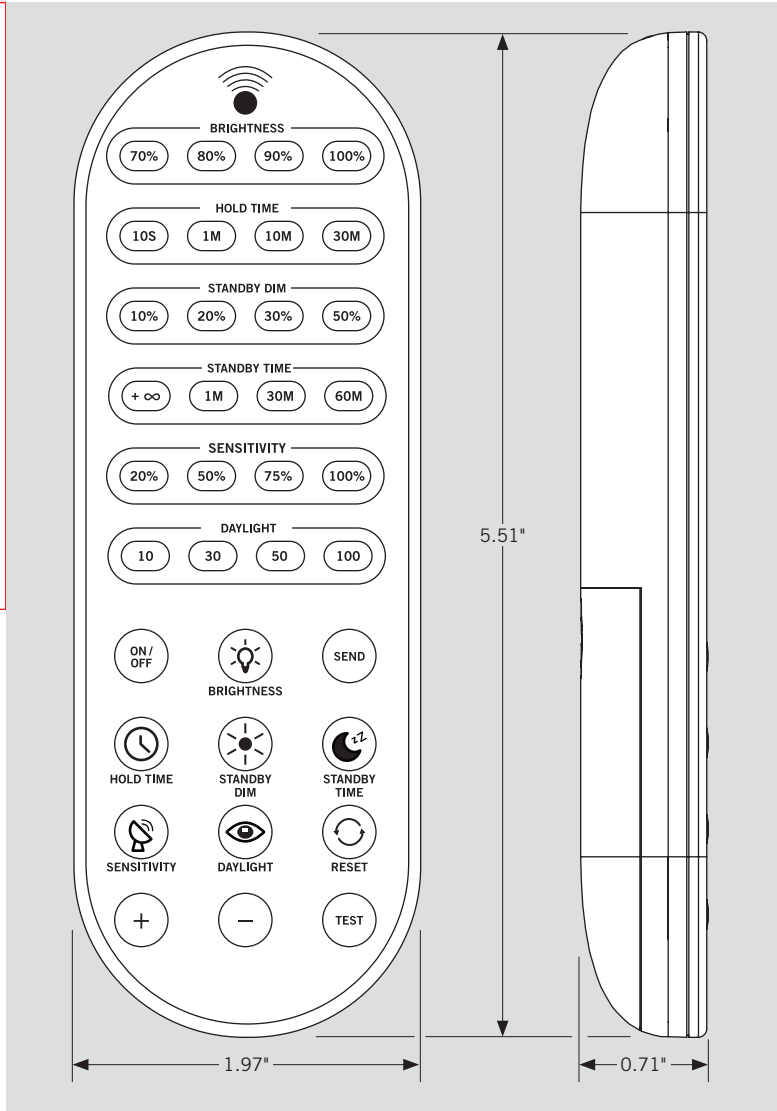


REMOTE CONTROL

FUNCTIONALITY AND PROGRAMMING







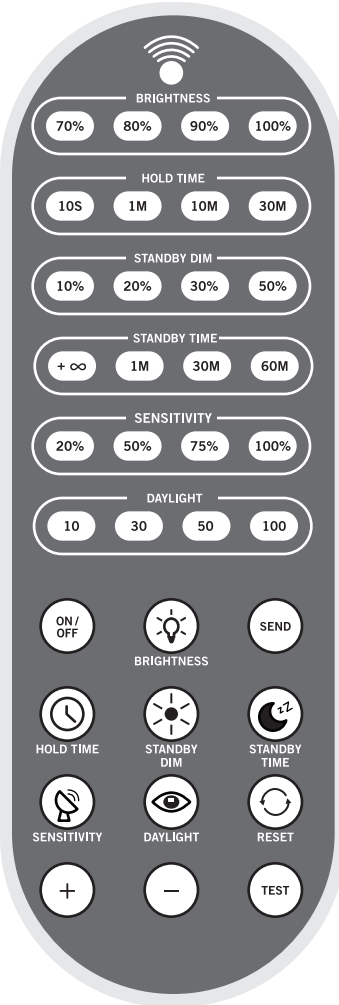





DISPLAY AREA

Brightness: 70%, 80%, 90%, 100%
Hold Time: 10 sec, 1 min, 10 min, 30 min
Standby Dim: 10%, 20%, 30%, 50%
Standby Time: +∞, 1 min, 30 min, 60 min
Sensitivity: 20%, 50%, 75%, 100%
Daylight: 10 lux, 30 lux, 50 lux, 100 lux

BUTTON SETTING AREA



BUTTON FUNCTION

 <p>On/Off To cycle between the six Display Areas: • Press and hold ON/OFF button until desired area is selected (buttons in the selected area will light up). To turn on/turn off fixture: • Press ON/OFF button.</p>	 <p>Brightness Press BRIGHTNESS to select dimming level: 70%, 80%, 90%, 100%.</p>	 <p>Send • Aim remote control at fixture and press SEND to transmit settings. • The fixture will pulse briefly to confirm receipt of new sensor programming.</p>
 <p>Hold Time Press HOLD TIME to select time: 10sec, 1 min, 10 min, 30 min.</p>	 <p>Standby Dim Press STANDBY DIM to adjust level: 10%, 20%, 30%, 50%.</p>	 <p>Standby Time Press STANDBY DIM to adjust time: +∞, 1 min, 30 min, 60 min. <i>Note:</i> With DAYLIGHT activated, choose: • Unlimited stand-by time (+∞); Default mode: light control, turn on/off; choices: 10/50 lux, 30/100 lux, 50/100 lux, 100/200 lux; OR • Light threshold mode choices: 10 lux, 30 lux, 50 lux, 100 lux (if light level is ≤ preset lux and motion is detected, light will turn on at preset lux).</p>
 <p>Sensitivity Press SENSITIVITY to adjust level: 20%, 50%, 75%, 100%.</p>	 <p>Daylight Press and hold DAYLIGHT to initiate, then press to adjust level: 10 lux, 30 lux, 50 lux, 100 lux.</p>	 <p>Reset Press RESET to return to "Dial Code" set mode; without "Dial Code" set mode, fixture will revert to default mode: BRIGHTNESS: 70%; HOLD TIME: 10 sec; DAYLIGHT: Off; SENSITIVITY: 20%; STANDBY DIM: 10%, STANDBY TIME: +∞.</p>
 <p>+ Press + or - to manually adjust brightness in smaller increments.</p>	 <p>- Press + or - to manually adjust brightness in smaller increments.</p>	 <p>Test • Press TEST and when SENSITIVITY lights up, the Sensitivity test mode will be activated. • If motion is detected, the light will turn on for 3 sec, turn off, and repeat. Press SENSITIVITY to choose: 20%, 50%, 75%, 100% sets for testing to ensure high efficiency.</p>

PROGRAMMING GUIDELINES

- The remote control is divided into two areas: **Display** and **Button Setting**.
- Aim remote control at the fixture you intend to adjust. Press and hold **ON/OFF** for 3 seconds to put the remote into Program mode and adjust any setting you'd like. Every press of the setting button in the **Button Setting Area** will change the current setting of the corresponding function as signaled by an illuminated indicator light in the **Display Area** of the remote.
- Once desired setting is made, push **SEND** one time to complete programming. The fixture will pulse briefly to confirm receipt of new sensor programming.
Note: To send a setting, ensure that the remote control is still in Program mode. If no button is pressed within 10 seconds, the setting indicator light will go out.
- Press **SEND** after every change to save that change.
- When using **TEST**, all reset buttons except for **TEST**, **SENSITIVITY**, and **SEND** buttons will be disabled.
- To enable/disable daylight, press and hold **DAYLIGHT** for 3 seconds. Point remote control at the desired fixture and press **SEND**.



REMOTE CONTROL

ORDERING INFORMATION

ORDER CODE	PACK QTY.	UPC	Easy Code
KTS-MW3-REMOTECONTROL	1	843654132020	XSR-61

CATALOG NUMBER BREAKDOWN

KTS-MW3-REMOTECONTROL

1 2 3 4

5

- 1 Keystone Technologies
- 2 Sensor
- 3 Microwave
- 4 Style/Design Designation
- 5 Remote Control

4 Style/Design Designation

3 Series 3