



CATALOG NUMBER:
KT-RKIT-2AG44-5000-8XX-VDIM



DESCRIPTION

UL 1598C Classified LED Retrofit Kit. Includes the Following Components:

(1) LED Driver, (2) Alumagroove LED Modules, (2) Lenses, Mounting Accessories (Jumper Wires, Tek Screws, Power Quick-Disconnect)



APPLICATION

Suitable for use in Troffers, Wraps, Strips, Vapor Tights, and other indoor fixture types.

PRODUCT FEATURES

Module Features

- For Use In Class 2 Lighting Systems
- High Lumen Density Design
- Completely Heat Sunked, No Additional Heat Sinking Needed to Maintain LED Lifetime
- Made with UL Recognized Components
- 2835 LED Chip Package
- Reported Life Expectancy: L70 >54,000 Hours at 85C | L90 48,000 Hours at 85C
- Calculated Life Expectancy: L70>160,000 Hours at 85C | L90 48,000 at 85C
- Beam Angle: 120 Degree
- Low Profile WAGO Push Connectors Located on Bottom of Modules to Eliminate Dark Spots on End-to-End Connections

Driver Features

- 120-277V Input, High Power Factor, 0-10V Dimming
- UL Class P
- Meets FCC Part 15 Class B (Consumer) Limit for EMI
- Over Current and Short Circuit Protection
- Class 2 Output
- Operating Temperature: -20C/-4F to 55C/131F
- THD < 20%
- DLC Premium Listed



CATALOG NUMBER:
KT-RKIT-2AG44-5000-8XX-VDIM

PERFORMANCE SPECIFICATIONS

4' LINEAR KITS, 80 CRI

KIT SPECIFICATIONS:

Dimming Type: 0-10V

Driver: (1) KTLD-36-UV-1100-VDIM-LA3

Module: (2) KTAG-44L-1400-30-8xx-RJ


Color Temp	Input Voltage	CRI	AlumaGroove Kit Catalog Number	No. of Modules	Total System Drive Current	Drive Current per Module	Total System Lumens	Total Module Power	Module Efficacy	Driver Efficiency	Total System Power	Total System Efficacy
3500K	120-277V	>80	KT-RKIT-2AG44-5000-835-VDIM	2	1100mA	550mA	5015	31W	164 lm/W	84%	36W	138 lm/W
4000K	120-277V	>80	KT-RKIT-2AG44-5000-840-VDIM	2	1100mA	550mA	5067	31W	166 lm/W	84%	36W	139 lm/W
5000K	120-277V	>80	KT-RKIT-2AG44-5000-850-VDIM	2	1100mA	550mA	5171	31W	169 lm/W	84%	36W	142 lm/W

ACCESSORIES


Lens	KTAG-44L-LENS
------	---------------

NOTE: Included

PHYSICAL SPECIFICATIONS

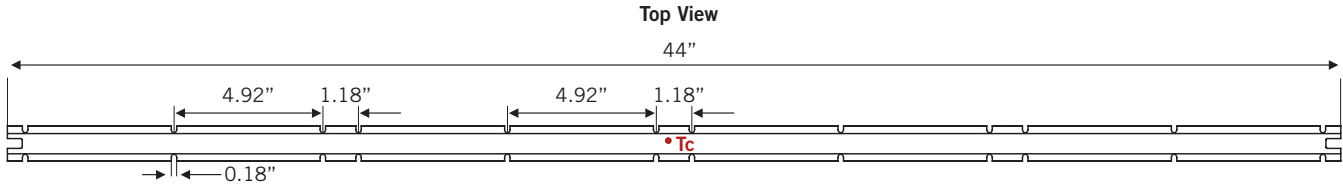


Side View

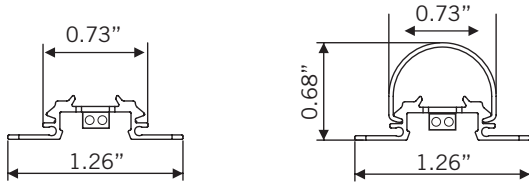

Without Lens

With Lens

CASE DIMENSIONS



LENGTH	9.5"
WIDTH	1.3"
HEIGHT	1"
MOUNTING	9"
CASE STYLE	LA3



FUTURE FIT[®]
LED KITS

CATALOG NUMBER:
KT-RKIT-2AG44-5000-8XX-VDIM

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-RKIT-2AG44-5000-8XX-VDIM	Individually Packaged	20	Quick Ship

CATALOG NUMBER BREAKDOWN

KT-RKIT-2AG44-5000-8XX-VDIM

Keystone Technologies | Retrofit Kit | Number of Modules | Alumina Groove | Nominal Length (In.) | Nominal Lumens | 80 CRI | Color Temp | 0-10V Dimmable