



KTEB-226-UV-PS-DW

COMPACT FLUORESCENT ELECTRONIC BALLAST



DESCRIPTION

2 x 26W CFL | 120-277V Input | High Power Factor | Program Start

STARTING METHOD: Program Start
LAMP CONNECTION: Series
INPUT VOLTAGE: 120-277Vac ±10%
INPUT FREQUENCY: 50/60 Hz
POWER FACTOR: High
WARRANTY: 5 Years

PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Meets ANSI/IEEE C62.41 Category A
- UL, cUL 935 Listed
- Lamp End-of-Life Protected
- Class P, Type 1 Outdoor
- Type HL

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD	Wiring Diagram
CFQ26W/G24q	2	120V	51W	0.43A	0.99	<1.70	1.00	1.96	12%	P2-2
		277V	51W	0.19A	0.99	<1.70	1.00	1.96	15%	P2-2
	1	120V	27W	0.23A	0.98	<1.70	1.00	3.70	12%	P1-2
		277V	27W	0.10A	0.98	<1.70	1.00	3.70	15%	P1-2
CFTR26W/GX24q	2	120V	54W	0.45A	0.99	<1.70	1.00	1.85	10%	P2-2
		277V	54W	0.20A	0.99	<1.70	1.00	1.85	15%	P2-2
	1	120V	29W	0.24A	0.98	<1.70	1.10	3.79	12%	P1-2
		277V	29W	0.11A	0.98	<1.70	1.10	3.79	15%	P1-2
CFTR42W/GX24q	1	120V	46W	0.38A	0.98	<1.70	0.98	2.13	15%	P1-2
		277V	46W	0.17A	0.98	<1.70	0.98	2.13	15%	P1-2
CFTR32W/GX24q	1	120V	36W	0.31A	0.98	<1.70	0.98	2.72	12%	P1-2
		277V	36W	0.13A	0.98	<1.70	0.98	2.72	15%	P1-2
CFS21W/GR10q	2	120V	51W	0.42A	0.99	<1.70	1.12	2.20	12%	P2-2
		277V	51W	0.18A	0.99	<1.70	1.12	2.20	15%	P2-2
CFTR57W/GX24q	1	120V	47W	0.40A	0.98	<1.70	0.88	1.87	12%	P1-2
		277V	48W	0.19A	0.93	<1.70	0.88	1.83	15%	P1-2
CFQ57W/G24q	1	120V	46W	0.40A	0.97	<1.70	0.88	1.91	12%	P1-2
		277V	47W	0.18A	0.93	<1.70	0.88	1.87	15%	P1-2
CFS28W/GR10q	1	120V	31W	0.27A	0.95	<1.70	1.00	3.23	15%	P1-2
		277V	33W	0.13A	0.93	<1.70	1.00	3.03	15%	P1-2
CFS38W/GR10q	1	120V	35W	0.30A	0.98	<1.70	0.80	2.29	12%	P1-2
		277V	37W	0.15A	0.90	<1.70	0.80	2.16	15%	P1-2
FT24W/2G11	2	120V	48W	0.41A	0.99	<1.70	0.93	1.94	10%	P2-2
		277V	48W	0.18A	0.99	<1.70	0.93	1.94	15%	P2-2
F24T5 HO	2	120V	51W	0.44A	0.99	<1.70	1.00	1.96	10%	F2-1
		277V	51W	0.19A	0.98	<1.70	1.00	1.96	10%	F2-1
FT18W/2G11	2	120V	34W	0.29A	0.99	<1.70	0.93	2.74	10%	P2-2
		277V	38W	0.15A	0.93	<1.70	0.93	2.45	15%	P2-2
FT40W/2G11	1	120V	43W	0.37A	0.98	<1.70	0.90	2.09	12%	P1-2
		277V	41W	0.16A	0.91	<1.70	0.90	2.20	15%	P1-2
FT39W/2G11	1	120V	42W	0.36A	0.98	<1.70	0.90	2.14	12%	P1-2
		277V	43W	0.17A	0.90	<1.70	0.90	2.09	15%	P1-2
FT36W/2G11	1	120V	33W	0.28A	0.98	<1.70	0.82	2.48	12%	P1-2
		277V	33W	0.13A	0.91	<1.70	0.82	2.48	15%	P1-2
FC16T9 40W	1	120V	43W	0.36A	0.99	<1.70	1.00	2.33	12%	P1-2
		277V	43W	0.16A	0.97	<1.70	1.00	2.33	15%	P1-2
FC12T5/2GX13	1	120V	38W	0.32A	0.98	<1.70	1.00	2.63	12%	P1-2
		277V	40W	0.16A	0.91	<1.70	1.00	2.50	15%	P1-2
FC9T5/2GX13	1	120V	29W	0.24A	0.99	<1.70	1.01	3.48	10%	P1-2
		277V	25W	0.10A	0.90	<1.70	1.01	4.04	15%	P1-2




KTEB-226-UV-PS-DW

COMPACT FLUORESCENT ELECTRONIC BALLAST

PHYSICAL SPECIFICATIONS




CASE DIMENSIONS




LENGTH	5.00"
WIDTH	2.40"
HEIGHT	1.00"
MOUNTING	4.63"
CASE STYLE	W1

CASE MATERIAL: Metal

WIRING DIAGRAMS

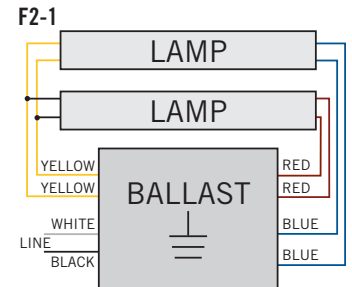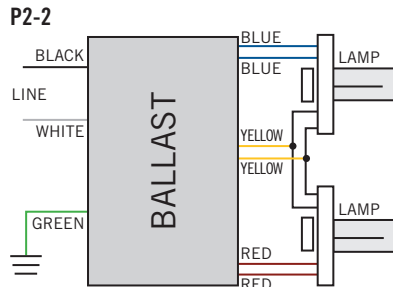

HOT SPOT LOCATION

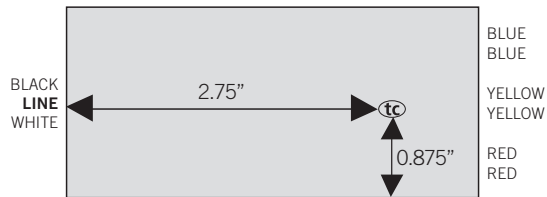

Actual tc point is noted on each ballast label.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-226-UV-PS-DW-CP	Carton	50	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-226-UV-PS-DW-CP

Keystone Technologies Electronic Ballast
2 Lamp
2 Wattage
Universal Voltage
Program Start
Dual Wire Connectors
Packaging Style