



PRODUCT FEATURES


STARTING METHOD: Instant	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 5 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: -20°F, -29°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Non Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: > 40kHz

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F96T8HO (86W)	2	120	146.0	1.22	0.99	<1.70	0.85	0.58	<10	F2-4
		277	146.0	0.54	0.98	<1.70	0.85	0.58	<10	F2-4
	1	120	89.0	0.75	0.99	<1.70	0.95	1.07	<10	F1-4
		277	89.0	0.33	0.97	<1.70	0.95	1.07	<10	F1-4
F72T8/HO (66W)	2	120	114.0	0.96	0.99	<1.70	0.86	0.75	<10	F2-4
		277	106.0	0.39	0.97	<1.70	0.86	0.81	<12	F2-4
	1	120	71.0	0.60	0.99	<1.70	0.94	1.32	<10	F1-4
		277	70.0	0.27	0.94	<1.70	0.94	1.34	<15	F1-4
F60T8/HO (56W)	2	120	84.0	0.71	0.99	<1.70	0.85	1.01	<10	F2-4
		277	84.0	0.32	0.95	<1.70	0.85	1.01	<15	F2-4
	1	120	52.0	0.44	0.99	<1.70	0.91	1.75	<10	F1-4
		277	55.0	0.22	0.90	<1.70	0.91	1.65	<15	F1-4
F48T8/HO (44W)	2	120	79.0	0.66	0.99	<1.70	0.88	1.11	<10	F2-4
		277	80.0	0.30	0.97	<1.70	0.88	1.10	<12	F2-4
	1	120	50.0	0.42	0.99	<1.70	0.93	1.86	<10	F1-4
		277	51.0	0.20	0.93	<1.70	0.93	1.82	<15	F1-4

WIRING DIAGRAMS

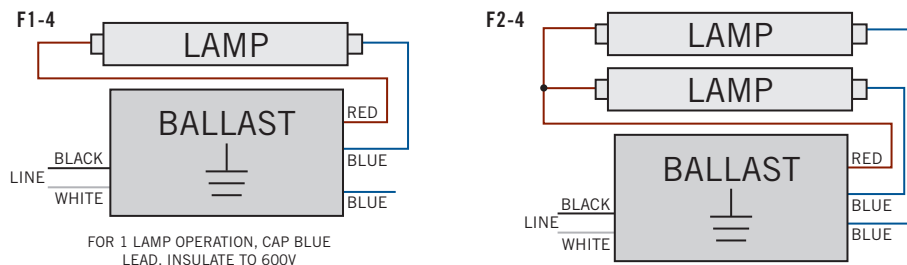




KTEB-286HO-UV-IS-N

T8HO ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

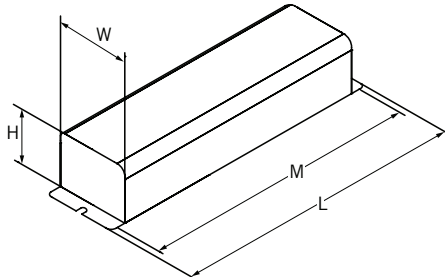

CASE DIMENSIONS


LENGTH: 9.50"
WIDTH: 2.36"
HEIGHT: 1.69"
MOUNTING: 8.84"
UNIT WEIGHT: 2.67 lbs

STANDARD LEAD LENGTHS*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 58.00" X 58.00"
RED: 66.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

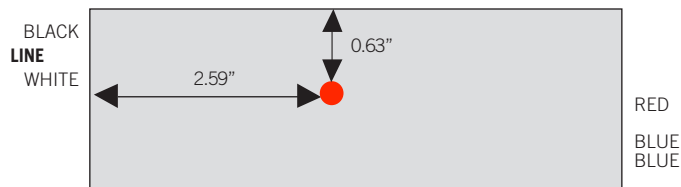

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-286HO-UV-IS-N-CP	Carton	10	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-286HO-UV-IS-N

