


XPANDER

Directional Light Output

Perfect for Wall Pack,
Canopy & Shoebox Fixtures



Integral Driver
Eliminates the Need for
External Driver or Ballast

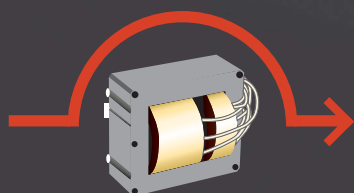

BYPASS THE BALLAST


Bypass the existing ballast and
connect the 120-277V line voltage
directly to the sockets. No ballast
or external driver is required.



BUILT-IN SURGE
PROTECTION



50,000 HOUR
LIFETIME



FULLY ENCLOSED
FIXTURE

IP64 RATED





KT-LED27HID-H-E26-8XX-D
KT-LED27HID-H-EX39-8XX-D

27
Watts

4100
Lumens

Replaces
100/150W
Metal Halide



KT-LED45HID-H-E26-8XX-D
KT-LED45HID-H-EX39-8XX-D

45
Watts

6400
Lumens

Replaces
175W
Metal Halide



KT-LED63HID-H-EX39-8XX-D

63
Watts

9200
Lumens

Replaces
250W
Metal Halide



KT-LED80HID-H-EX39-8XX-D

only for use in canopy and shoebox fixtures

80
Watts

10000
Lumens

Replaces
250/320W
Metal Halide







KT-LED110HID-H-EX39-8XX-D

only for use in canopy and shoebox fixtures

110
Watts

14000
Lumens


Replaces
400W
Metal Halide

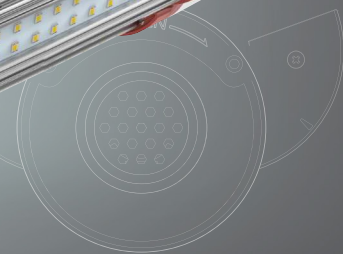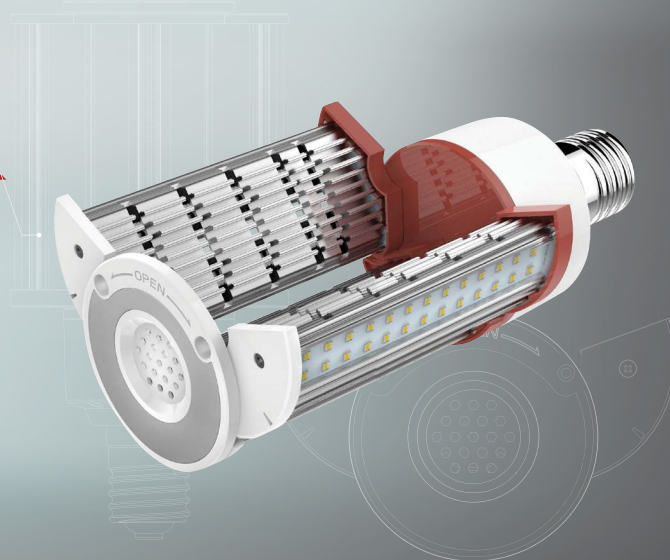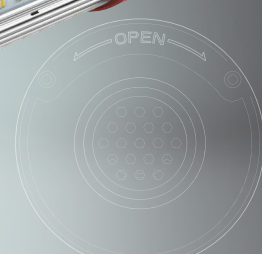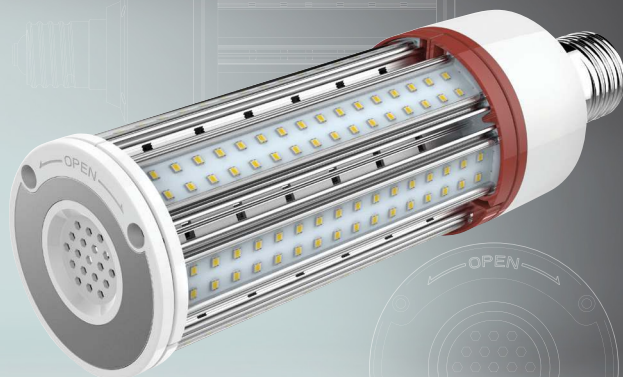

**Integrated
Heat Sink**
Quickly Dissipates Heat



Mounting Accessory
Stabilizes Lamp in
Horizontal Orientation

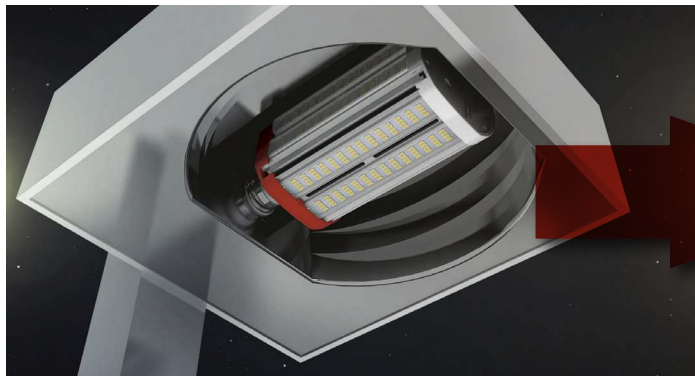

EC&M
Product of the Year
2018 Category Winner



RoHS
Compliant

5YEAR
WARRANTY

Catalog Number	Rated Lamp Wattage	Metal Halide Equivalent Wattage	Input Voltage	Base Type	Lumens	CRI	IP Rating	Efficacy	Meets DLC
NEW! KT-LED27HID-H-E26-8xx-D*	27W	100/150W	120-277V	Medium E26	4,100	85	IP64	152 lm/W	N/A
KT-LED27HID-H-EX39-8xx-D	27W	100/150W	120-277V	EX39 Rotatable	4,100	85	IP64	152 lm/W	Yes
NEW! KT-LED45HID-H-E26-8xx-D*	45W	175W	120-277V	Medium E26	6,400	85	IP64	142 lm/W	N/A
KT-LED45HID-H-EX39-8xx-D	45W	175W	120-277V	EX39 Rotatable	6,400	85	IP64	142 lm/W	Yes
KT-LED63HID-H-EX39-8xx-D	63W	250W	120-277V	EX39 Rotatable	9,200	85	IP64	146 lm/W	Yes
KT-LED80HID-H-EX39-8xx-D**	80W	250/320W	120-277V	EX39 Rotatable	10,000	85	IP64	125 lm/W	Yes
KT-LED110HID-H-EX39-8xx-D**	110W	400W	120-277V	EX39 Rotatable	14,000	85	IP64	127 lm/W	Yes

*Available Q2 2019

**Not for use in wall pack fixtures

*8xx denotes several color temperatures available. 80W and 110W lamps are not available in 3000K.

830 800 Series, 3000K **840** 800 Series, 4000K **850** 800 Series, 5000K

Typical Applications



Accessories (Sold Separately)

Catalog Number	Description
KTSP-10KV	External surge protector; input voltage: 120-277V; maximum peak current: 10kV; IP65 Rated
KT-ADAPTER-E39-E26	Socket base adapter allowing an E26 base lamp to be used in an E39 socket
KTAT-70-480-277	480V to 277V step-down auto-transformer
KTAT-250-480-277	480V to 277V step-down auto-transformer
KTAT-150-480-277-OC	480V to 277V step-down auto-transformer, open core



Seeing is believing!
Retail and counter displays are available to help you increase sales.



SINCE 1945
KEYSTONE
LIGHT MADE EASY