



**DIRECT DRIVE LED**  
LINE VOLTAGE T8 TUBES

# KT-LED32T8-72GC-850-D

## T8 LED LAMP

### DESCRIPTION

32W T8 LED | 5000K | >83 CRI | High Efficiency



**LAMP TYPE:** Linear

**BULB TYPE:** T8 LED

**BASE TYPE:** G13 (Medium Bi-Pin)

**WATTAGE:** 32W

**COLOR TEMPERATURE:** 5000K

**COLOR RENDERING INDEX (CRI):** >83

**WARRANTY:** 5 Years



### PRODUCT FEATURES

- Replacement for Conventional Fluorescent Lamp
- 50,000+ Hour Lifetime
- Approximately 40% More Energy Efficient than Standard F32T8 Lamps
- Environmentally Friendly: No Mercury Used
- Instant Startup
- Frosted Lens Eliminates Pixelation
- UL Classified
- Operating Temperature: -20°C/-4°F to 45°C/113°F
- Integral Driver (Isolated), Eliminates the Need for External Driver or Ballast
- 100+ Lumens per Watt
- Improved Lamp Durability with Shatterproof Coated Glass
- ETL Sanitation Listed NSF/ANSI Standard 2 - Food Equipment

### OPERATING SPECIFICATIONS

#### ELECTRICAL CHARACTERISTICS

Input Voltage	Power Consumption	Power Factor	Input Current
120-277Vac	32W	>0.9	0.26A @ 120V 0.12A @ 277V


#### PHOTOMETRIC CHARACTERISTICS

Color Temperature (CCT)	5000K
Luminous Flux	3400 lm
Color Rendering Index (CRI)	>83
Efficacy	106 lm/W
Beam Angle	240°
Visible Light Area	325°


#### RATED LIFE

L70 (Hours)	50,000
-------------	--------

#### SPECTRAL DISTRIBUTION

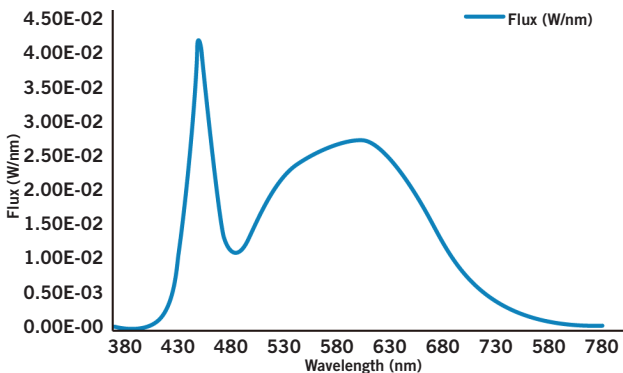

#### POLAR CANDELA DISTRIBUTION

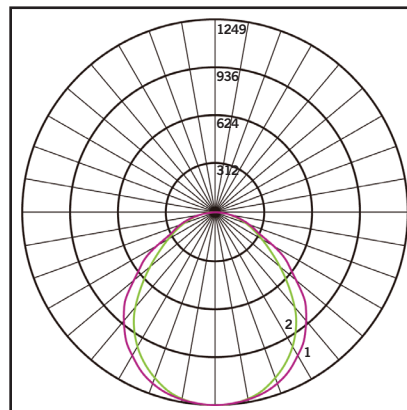

Located at Horizontal Angle = 0,  
Vertical Angle 0

1. **Violet** Vertical Plane through Horizontal Angles (90-270)
2. **Green** Vertical Plane through Horizontal Angles (0-180)




**DIRECT DRIVE LED**  
LINE VOLTAGE T8 TUBES

## KT-LED32T8-72GC-850-D


### T8 LED LAMP

#### WIRING DIAGRAMS

1. Wire fixture as shown below.

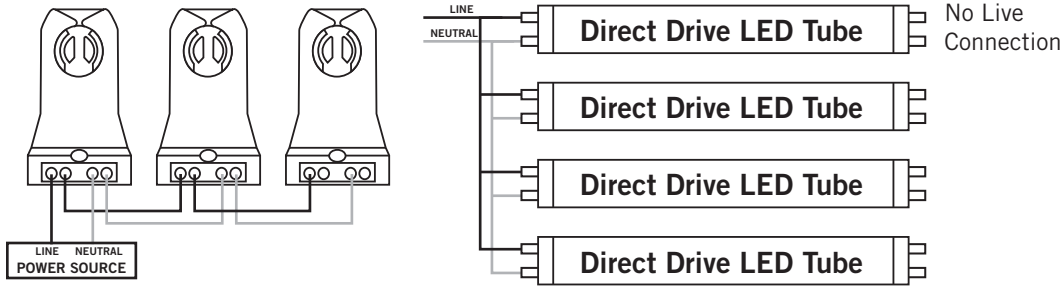

#### Typical Non-Shunted Lampholder



Connect wires directly to these terminals


#### **CAUTION: Use only non-shunted lampholders.**

Do not install product in a fixture with shunted lampholders (found in all fixtures using instant start ballasts). If the current lampholders are shunted, remove them and replace them with non-shunted lampholders. Make new connections directly to terminals as indicated above.

Keystone can provide any style replacement lampholders. Call us at 800-464-2680.

#### PHYSICAL CHARACTERISTICS

##### LAMP DIMENSIONS



NOMINAL LENGTH: 72" BASE TYPE: G13 (Medium Bi-Pin)

#### ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-LED32T8-72GC-850-D-CP	Carton Pack (Egg Crate Packaging)	12	Quick Ship

#### CATALOG NUMBER BREAKDOWN

# KT-LED32T8-72GC-850-D-CP

Keystone Technologies	LED Lamp	Wattage	Lamp Type	Nominal Length (Inches)	Shatter-Proof Coated Glass	800 Series	Color Temp.	Direct Drive Series	Packaging Style
-----------------------	----------	---------	-----------	-------------------------	----------------------------	------------	-------------	---------------------	-----------------