



KT-MSLED44-4-8XX-VDIM-P

LED MICROSTRIP FIXTURE

DESCRIPTION

4' 44W LED Microstrip Fixture | 120–277V Input | Frosted Lens | 0–10V Dimming | Premium Series

APPLICATION

Used for commercial, retail, and residential strip applications



PRODUCT FEATURES


- Powered by Keystone 0–10V dimming LED drivers
- Smooth diffused lens for an even appearance
- 0–10V dimming, 10% minimum
- Compatible with Keystone SmartSafe emergency LED drivers; KT-EMRG-LED-5-500 /NB or KT-EMRG-LED-12-1200 /NB are optimal for fixture level installation
- Compatible with Keystone 480–277V step down transformers
- Compatible with Keystone occupancy sensors
- Ambient operating temperature: –20°C/–4°F to 50°C/122°F
- UL Listed 1598: Suitable for dry and damp locations
- THD: <20%
- Power factor >0.95
- L70 >50,000 hours
- DLC Premium Listed

PRODUCT SPECIFICATIONS

Catalog Number	Color Temperature	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
KT-MSLED44-4-835-VDIM-P	3500K	4 ft.	120–277V	44W	>82.0	5,632	128 lm/W
KT-MSLED44-4-840-VDIM-P	4000K	4 ft.	120–277V	44W	>82.0	5,720	130 lm/W
KT-MSLED44-4-850-VDIM-P	5000K	4 ft.	120–277V	44W	>82.0	5,764	131 lm/W

PHOTOMETRIC SPECIFICATIONS

ISOCANDELA PLOT

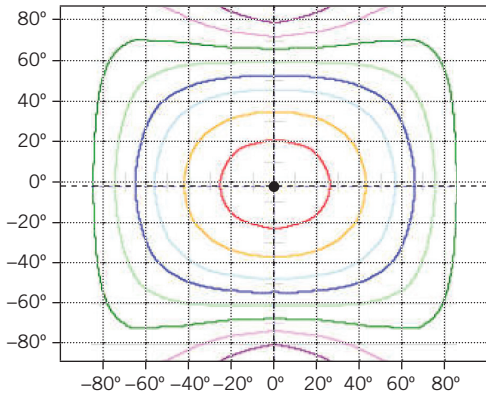

■ Cd: 1,425, 90%	■ Cd: 633, 40%
■ Cd: 1,188, 75%	■ Cd: 475, 30%
■ Cd: 950, 60%	■ Cd: 317, 20%
■ Cd: 792, 50%	■ Cd: 158, 10%

----- Point of Max Cd: 1,585.2

ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
0–30	1,125.1	22%
0–40	2,008.6	36%
0–60	3,606.8	64.6%
60–90	1,475.0	26.4%
70–100	1,036.0	18.6%
90–120	411.3	7.4%
0–90	5,081.8	91.1%
90–180	498.7	8.9%
0–180	5,580.5	100%



KT-MSLED44-4-8XX-VDIM-P

LED MICROSTRIP FIXTURE

PHYSICAL SPECIFICATIONS

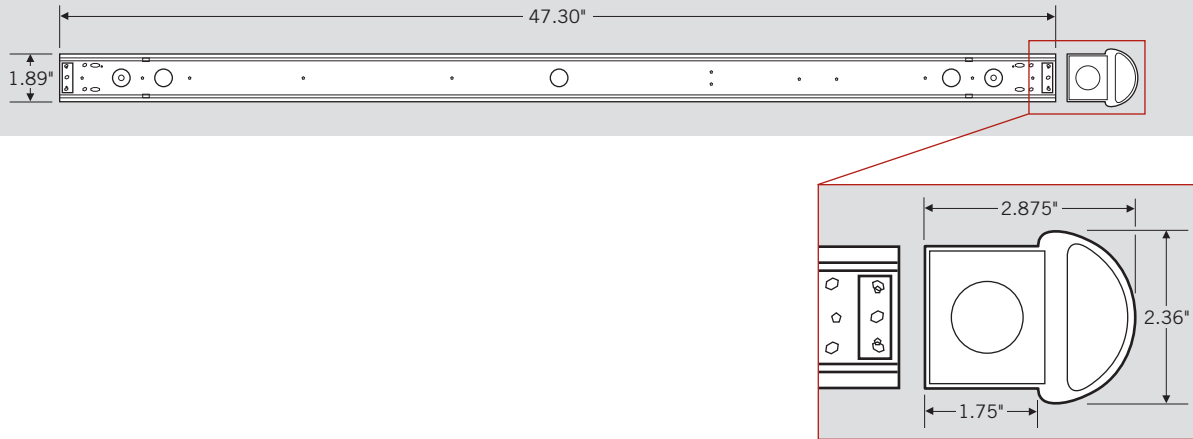

ORDERING INFORMATION

Order Code	Packaging Style	Pack Quantity	Item Status
KT-MSLED44-4-835-VDIM-P	Carton Pack	1	Active
KT-MSLED44-4-840-VDIM-P	Carton Pack	1	Active
KT-MSLED44-4-850-VDIM-P	Carton Pack	1	Active

ACCESSORIES (SOLD SEPARATELY)

Accessory	Catalog Number	Description
SmartSafe Emergency Battery Backup	KT-EMRG-LED-5-500 /NB	5W, 500 lumen SmartSafe emergency battery backup with narrow battery
	KT-EMRG-LED-12-1200 /NB	12W, 1200 lumen SmartSafe emergency battery backup with narrow battery
V-Hooks for Suspended Mounting	KT-MSLED-VH-KIT	Two (2) V-Hooks and chains for chain-suspended mounting

CATALOG NUMBER BREAKDOWN

KT-MSLED44-4-8XX-VDIM-P

1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 LED Microstrip Fixture
- 3 Wattage
- 4 4' Nominal Length
- 5 800 Series
- 6 Color Temperature
- 7 0-10V Dimming
- 8 Premium Series