



KTEB-2C72-1-TP-WS

CIRCLINE ELECTRONIC BALLAST



DESCRIPTION

2x FC16T9 + FC12T9 | 120V Input | Normal Power Factor | Rapid Start

STARTING METHOD: Rapid Start
LAMP CONNECTION: Series
INPUT VOLTAGE: 120Vac ±10%
INPUT FREQUENCY: 60 Hz
POWER FACTOR: Normal
WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Case Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- UL Listed (Class P, Type 1 Outdoor)
- Remote Mounting: 18ft. max. Lead length
- Type HL

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Rated Lamp Watts	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
FC16T9+FC12T9	1 + 1	40 + 32	120V	63W	0.93A	0.50	1.7	0.80	1.26	140%
FC12T9 + FC12T9	1 + 1	32 + 32	120V	54W	0.85A	0.50	1.7	0.80	1.48	145%
FC12T9+FC8T9	1 + 1	32 + 22	120V	47W	0.76A	0.50	1.7	0.81	1.72	155%
FC8T9+FC8T9	1 + 1	22 + 22	120V	40W	0.67A	0.50	1.7	0.81	2.03	170%

WIRING DIAGRAM

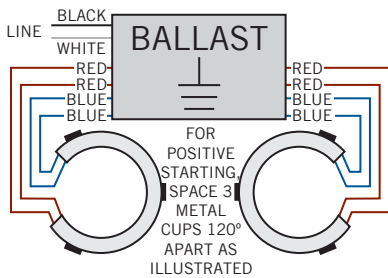

HOT SPOT LOCATION






KTEB-2C72-1-TP-WS

CIRCLINE ELECTRONIC BALLAST

PHYSICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	6.00"
WIDTH	1.78"
HEIGHT	1.08"
MOUNTING	5.70"
CASE STYLE	L40

STANDARD LEAD LENGTHS*

BLACK	14"
WHITE	14"
BLUE	9"
RED	9"

Lead wires are 18 AWG

CASE MATERIAL: Steel

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-2C72-1-TP-WS-CP	Carton Pack	20	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-2C72-1-TP-WS-CP

KTEB	2C72	1	TP	WS	CP
Keystone Technologies Electronic Ballast	No. Circline Wattage Lamps	120 Input	Thermally Protected	With Circline Sockets	Packaging Style