



KTEB-2C72-1-TP

T8 ELECTRONIC BALLAST



DESCRIPTION

2 x F32T8 | 120V | Normal Power Factor | Rapid Start

STARTING METHOD: Rapid Start
LAMP CONNECTION: Parallel
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 60/50 Hz
POWER FACTOR: Normal
WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Ballast Frequency for All Listed Lamps: 20KHz-33KHz
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
F32T8	2	120V	62W	0.89A	0.58	0.58	0.90	1.45	130%
	1	120V	33W	0.53A	0.52	1.40	0.90	2.73	130%
F25T8	2	120V	47W	0.70A	0.55	1.55	0.95	2.02	150%
	1	120V	24W	0.42A	0.49	1.47	0.95	3.96	150%
F17T8	2	120V	36W	0.57A	0.53	1.55	0.95	2.64	160%
	1	120V	19W	0.34A	0.46	1.61	0.95	5.00	160%
F15T8	2	120V	29W	0.48A	0.50	1.69	0.95	3.28	160%
	1	120V	15W	0.29A	0.45	1.55	0.95	6.33	160%

WIRING DIAGRAM

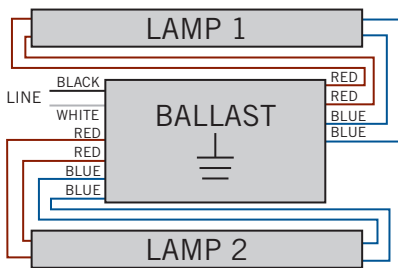

CONNECT WIRES FROM RIGHT SIDE OF BALLAST TO LAMP 1
 CONNECT WIRES FROM LEFT SIDE OF BALLAST TO LAMP 2




KTEB-2C72-1-TP

T8 ELECTRONIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS

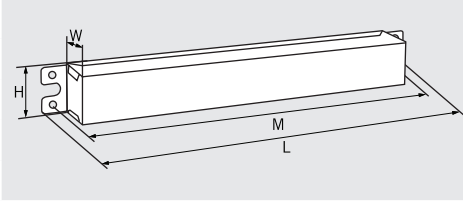

LENGTH	6.46"
WIDTH	1.89"
HEIGHT	1.00"
MOUNTING	6.00"
CASE STYLE	L1

STANDARD LEAD LENGTHS*

BLACK	10"
WHITE	10"
BLUE	14"
RED	30"

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-2C72-1-TP-CP	Carton Pack	Pending	Active
KTEB-2C72-1-TP-BP	Bulk Pack	Pending	Active

CATALOG NUMBER BREAKDOWN

KTEB-2C72-1-TP-CP

┌───┐ └───┘	┌───┐ └───┘	┌──┐ └──┘	┌──┐ └──┘	┌──┐ └──┘
Keystone Technologies Electronic Ballast	2 x F32T8 Lamps	120V Input	Thermally Protected	Packaging Style