



| |
|--|
| KTLD-16-1-XXX-FDIM-AQ1 |
| Constant current LED driver |
| Total power: 16W |
| Input voltage: 120Vac ± 10% |
| Number of outputs: One |
| UL 8750 |
| IP20 or IP66 design |
| Dimmable with leading / trailing edge dimmer |
| 5 year warranty |


| ELECTRICAL SPECIFICATIONS: | | ENVIRONMENTAL SPECIFICATIONS: | |
|----------------------------|--|-------------------------------|---|
| Input voltage range: | 120Vac ± 10% | Operating temperature: | -30 to 60°C |
| Frequency: | 60Hz | Storage temperature: | -40 to 85°C |
| Power factor: | >0.9 @full load | Humidity: | 5% to 95% |
| Inrush current: | 2A @120V | MTBF: | 690,000 hours at 40°C ambient (~70°C Case temp) |
| Max input current: | 0.18A @120V | Maximum case Temperature | 90°C |
| THD: | <20% | | |
| Protection: | Over voltage, Over current and Short circuit | | |
| Withstand voltage | I/P – O/P 2k Vac | | |

| PRODUCT SPECIFICATIONS: | | | | | | | |
|-------------------------|------------------|----------------|----------------|------------|------------------------------------|---------|--------|
| Model Number | Max output power | Output Current | Output Voltage | Efficiency | Remote mounting distance (#18 AWG) | Class 2 | |
| | | | | | | US | Canada |
| KTLD-16-1-300-FDIM-AQ1 | 25W | 300mA | 17 – 53V | 80% | 128 ft | √ | |
| KTLD-16-1-350-FDIM-AQ1 | 25W | 350mA | 15 – 46V | 80% | 109 ft | √ | |
| KTLD-16-1-400-FDIM-AQ1 | 25W | 400mA | 13 – 40V | 80% | 96 ft | √ | √ |
| KTLD-16-1-450-FDIM-AQ1 | 25W | 450mA | 13 – 37V | 80% | 85 ft | √ | √ |
| KTLD-16-1-500-FDIM-AQ1 | 25W | 500mA | 10 - 32V | 80% | 76 ft | √ | √ |
| KTLD-16-1-600-FDIM-AQ1 | 25W | 600mA | 9 – 27V | 80% | 64 ft | √ | √ |
| KTLD-16-1-700-FDIM-AQ1 | 25W | 700mA | 7 – 23V | 80% | 54 ft | √ | √ |
| KTLD-16-1-800-FDIM-AQ1 | 25W | 800mA | 7 – 20V | 80% | 48 ft | √ | √ |
| KTLD-16-1-900-FDIM-AQ1 | 25W | 900mA | 6 – 18V | 80% | 42 ft | √ | √ |
| KTLD-16-1-1000-FDIM-AQ1 | 25W | 1000mA | 6 - 16V | 80% | 38 ft | √ | √ |
| KTLD-16-1-1100-FDIM-AQ1 | 25W | 1100mA | 6 - 15V | 80% | 34 ft | √ | √ |



| SAFETY AND EMC COMPLIANCE: | |
|----------------------------|------------------------|
| UL/cUL | UL 8750 |
| FCC, 47CFR Part 15 | Class B Consumer Limit |
| EN61000-3-2 | |

| PHYSICAL DIMENSIONS: | |
|----------------------|---------|
| Length (L): | 3.07" |
| Width (W): | 3.15" |
| Height (H): | 1.00" |
| Mounting (M): | 2.76" |
| Weight: | 0.19 kg |

| WIRE SPECIFICATIONS: | |
|----------------------|---------------------------------------|
| Input: | 12", UL 1316 #18AWG (Black and White) |
| Output: | 12", UL 1316 #18AWG (Red and Blue) |

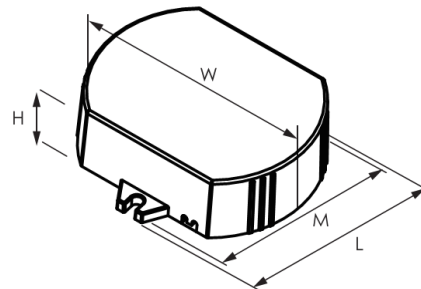

Keystone Technologies • 208 Progress Drive, Montgomeryville, PA 18936
 Phone (800) 464-2680 • Fax (888) 966-0556 • www.keystoneballast.com

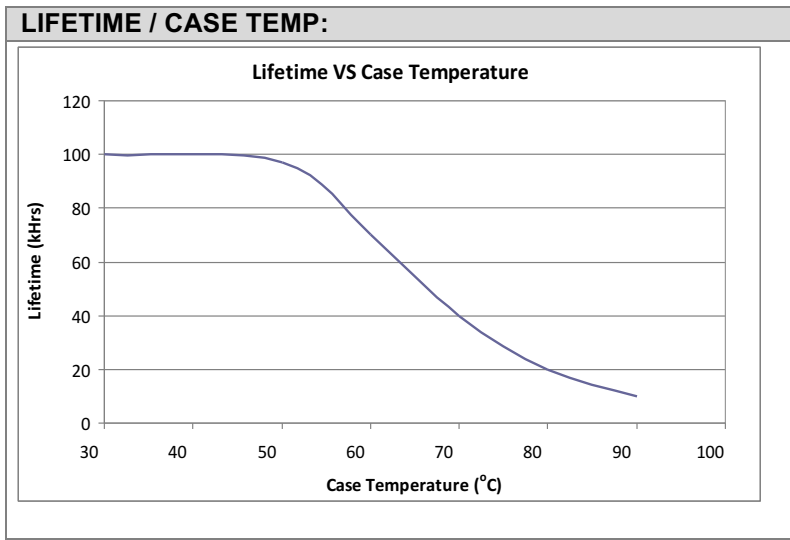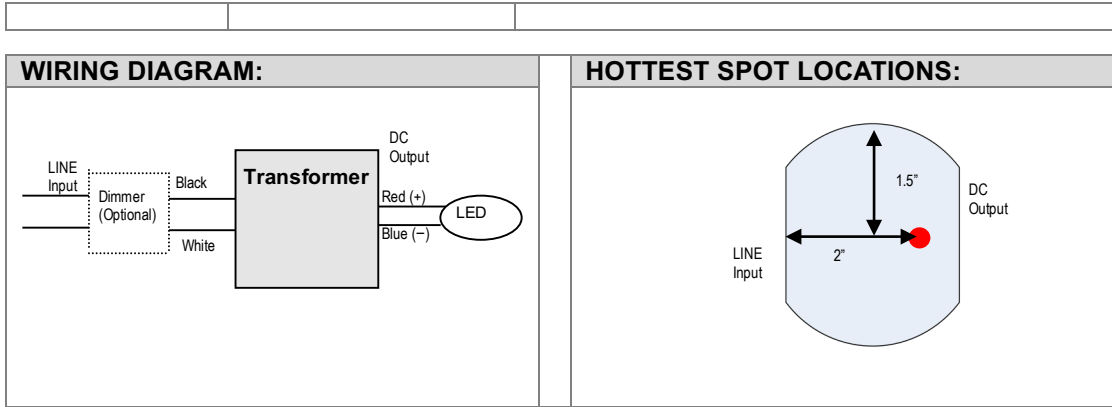

Keystone Technologies • 208 Progress Drive, Montgomeryville, PA 18936
 Phone (800) 464-2680 • Fax (888) 966-0556 • www.keystoneballast.com