



# ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS

## KT-LED5.5FG25-E26-9XX-F

REPLACEMENT LAMP

### DESCRIPTION

5.5W G25 Lamp | 2700–5000K |  $\geq 90$  CRI | Frosted Globe



|   |
|---|
| <b>LAMP TYPE:</b> Filament G25                |
| <b>BASE TYPE:</b> E26 (Medium)                |
| <b>WATTAGE:</b> 5.5W                          |
| <b>COLOR TEMPERATURE:</b> 2700–5000K          |
| <b>COLOR RENDERING INDEX (CRI):</b> $\geq 90$ |
| <b>WARRANTY:</b> 3 Years                      |
| <b>RATED LIFE:</b> L70 (15,000 Hours)         |



### TYPICAL APPLICATIONS

- Chandeliers
- Vanity Fixtures
- Decorative Accent Lighting
- Wall Sconces
- Pendant Lights

### PRODUCT FEATURES

- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- Smooth, uniform dimming
- Filament-style LED construction offers unique traditional appearance for decorative and mood-sensitive applications
- HiCRI LEDs offer enhanced color rendering vs. 80 CRI LEDs, providing ideal clarity, representation, uniformity of illuminated area/objects
- Long life minimizes replacement and maintenance costs
- Suitable for use in damp locations
- Operating temperature range  $-4^{\circ}\text{F}/-20^{\circ}\text{C}$  to  $95^{\circ}\text{F}/35^{\circ}\text{C}$
- PF  $> 0.70$
- Rated for open, recessed, and enclosed fixtures
- ANSI compliant construction ensures fitment for intended applications
- UL Listed
- Meets Energy Star requirements
- Complies with Part 15 of FCC
- Title 20 compliant

### ELECTRICAL AND PERFORMANCE SPECIFICATIONS


| Keystone Catalog Number | Description                                | Color Temp* | Input Voltage | Rated Lamp Wattage | Legacy Equivalent Wattage | Lumens | Efficacy | CRI       | Base Type | Beam Angle | Dimmable |
|-------------------------|--|-------------|---------------|--------------------|---------------------------|--------|----------|-----------|-----------|------------|----------|
| KT-LED5.5FG25-E26-927-F | G25 filament globe bulb; Frosted; Dimmable | 2700K       | 120V          | 5.5W               | 60W incandescent          | 500 lm | 91 lm/W  | $\geq 90$ | E26       | 360°       | Yes      |
| KT-LED5.5FG25-E26-930-F | G25 filament globe bulb; Frosted; Dimmable | 3000K       | 120V          | 5.5W               | 60W incandescent          | 500 lm | 91 lm/W  | $\geq 90$ | E26       | 360°       | Yes      |
| KT-LED5.5FG25-E26-950-F | G25 filament globe bulb; Frosted; Dimmable | 5000K       | 120V          | 5.5W               | 60W incandescent          | 500 lm | 91 lm/W  | $\geq 90$ | E26       | 360°       | Yes      |

\* Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017

# KT-LED5.5FG25-E26-9XX-F

## REPLACEMENT LAMP

### PHYSICAL CHARACTERISTICS

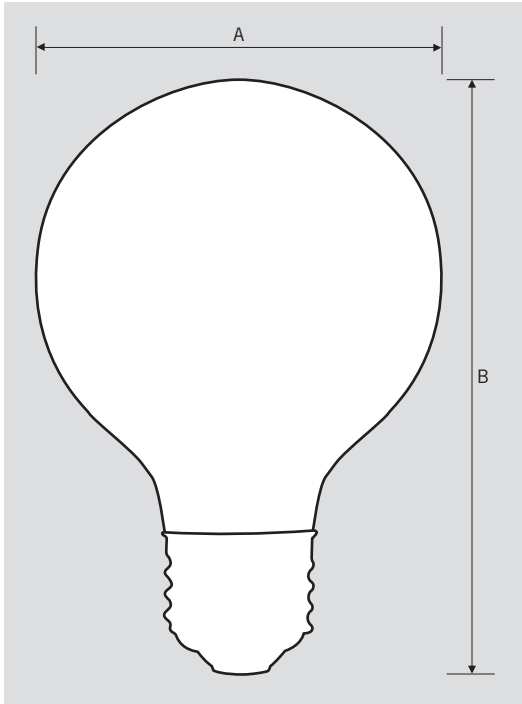

### LAMP DIMENSIONS

|              |       |
|--------------|-------|
| A (Diameter) | 3.15" |
| B (Length)   | 4.53" |

BASE TYPE: E26 (Medium)

### RATED LIFE

|             |        |
|-------------|--------|
| L70 (Hours) | 15,000 |
|-------------|--------|

### PACKAGING

|                   |                          |
|-------------------|--------------------------|
| Carton Quantity   | 24 pcs                   |
| Carton Dimensions | 15.54" × 11.42" × 11.82" |
| Carton Weight     | 5.52 lbs                 |

### ORDERING INFORMATION

| ORDER CODE              | CARTON QUANTITY | ITEM STATUS | EASY CODE | UPC          |
|-------------------------|-----------------|-------------|-----------|--------------|
| KT-LED5.5FG25-E26-927-F | 24 pcs          | Active      | UGF-75    | 843654123820 |
| KT-LED5.5FG25-E26-930-F | 24 pcs          | Active      | FNE-30    | 843654129600 |
| KT-LED5.5FG25-E26-950-F | 24 pcs          | Active      | RKH-43    | 843654123837 |

### CATALOG NUMBER BREAKDOWN

# KT-LED5.5FG25-E26-9XX-F

1 2 3 4 5 6 7 8 9

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Filament Bulb
- 5 Lamp Shape
- 6 Base Type
- 7 900 Series
- 8 Color Temperature
- 9 Frosted Bulb