



# KT-BPLED40-24-8XX-VDIM

## BACKLIT LED PANEL LIGHT

### DESCRIPTION

2'x4' LED panel light, 40W, 120-277V input, 0-10V dimming



### PRODUCT FEATURES

- Aluminum frame featuring stepped edge design detail and gloss white paint for improved aesthetics
- New backlit style design; fits standard T-grid ceilings
- Suitable for recessed or surface mount (with optional accessories)\*
- Construction features precise optical lenses over each individual LED, offering optimal light diffusion and consistent surface illumination, with no risk of yellowing over product lifetime
- Suitable for damp locations
- Powered by Keystone 0-10V dimmable LED driver with built-in junction box
- Compatible with Keystone SmartSafe LED emergency backup
- Over 50% energy savings compared to traditional fluorescent troffers
- Operating temp range -20°C/-4°F to 40°C/104°F


\* For use in non-fire rated installations only

### PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Wattage	Color Temperature	Lumen Output	CRI	Power Factor	Efficacy	Lifetime
KT-BPLED40-24-835-VDIM	120-277V	40W	3500K	4,400	>80	>0.9	110 lm/W	50,000 Hours
KT-BPLED40-24-840-VDIM	120-277V	40W	4000K	4,400	>80	>0.9	110 lm/W	50,000 Hours
KT-BPLED40-24-850-VDIM	120-277V	40W	5000K	4,400	>80	>0.9	110 lm/W	50,000 Hours

### PHOTOMETRIC SPECIFICATIONS


#### ISOCANDELA PLOT

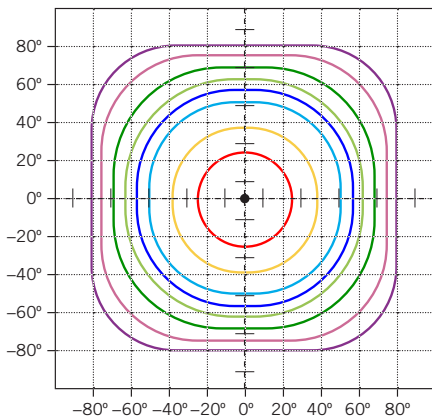

■ Cd: 1,315, 90%	■ Cd: 584, 40%
■ Cd: 1,096, 75%	■ Cd: 438, 30%
■ Cd: 876, 60%	■ Cd: 292, 20%
■ Cd: 730, 50%	■ Cd: 146, 10%

----- Point of Max Cd: 1,461.4

#### POLAR CANDELA DISTRIBUTION

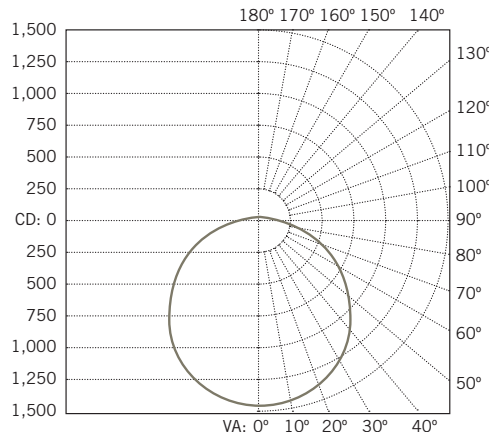


■ 0° H
■ 90° H
■ 22.5° H
■ 45° H
■ 67.5° H

#### ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30	1,140.8	26.5%
0-40	1,875.0	43.6%
0-60	3,339.8	77.6%
60-90	958.3	22.3%
70-100	491.1	9.7%
90-120	3.4	0.1%
0-90	4,298.1	99.9%
90-180	5.9	0.1%
0-180	4,304.1	100%

**KT-BPLED40-24-8XX-VDIM**  
BACKLIT LED PANEL LIGHT

**PHYSICAL SPECIFICATIONS**

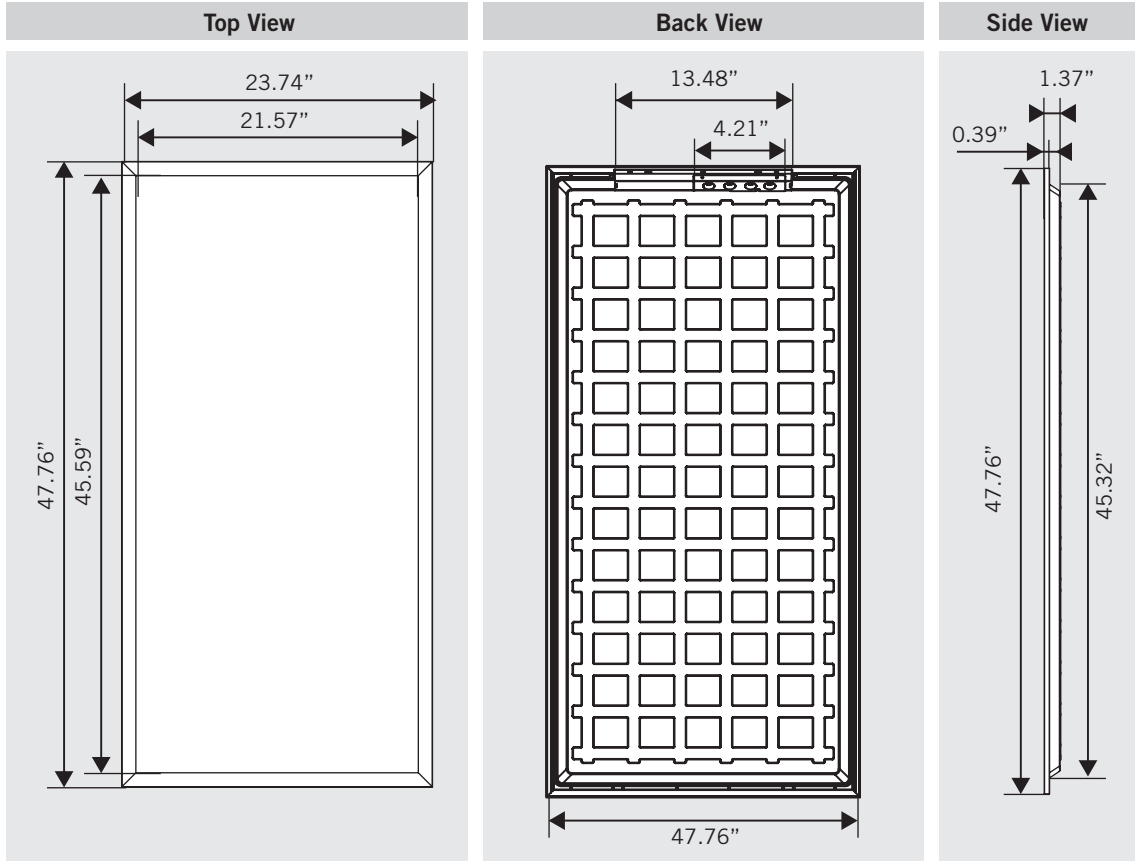


**WEIGHT INFORMATION**

1 Piece	1 Carton
11.5 lbs	23 lbs

**EXPLODED VIEW**

**CONSTRUCTION FEATURES**

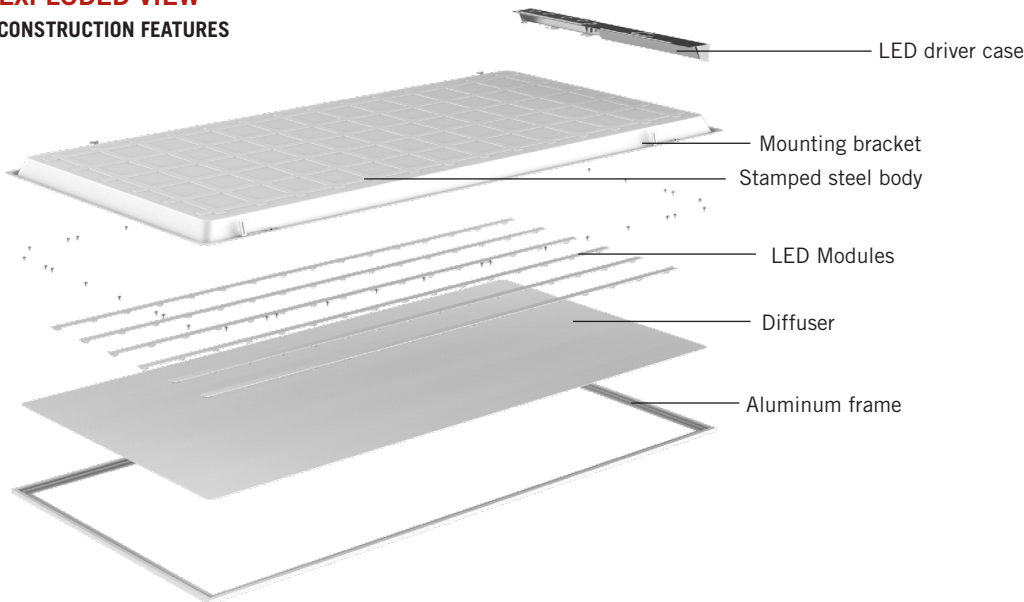



# KT-BPLED40-24-8XX-VDIM

## BACKLIT LED PANEL LIGHT

**WIRELESS CONTROL OPTIONS**

Brand / System	Description	Ordering Number
Lutron Vive	FCJS-010 Wireless 0-10V fixture controller; 1A Max load; factory installed	KT-BPLED40-24-8XX-VDIM /FCJS0



**ACCESSORIES (SOLD SEPARATELY)**

Accessory	Catalog Number	Description
Emergency Battery Backup Mounting Kit	KT-BPLED-EM-22/4-KIT	Mounting Bracket for SmartSafe LED emergency backup for 2x2 and 2x4 backlit panels
Surface Mount Kit	KT-BPLED-SM-24-KIT	Surface Mount Kit 2x4 Backlit panels
J-Box	KT-BPLED-JBOX-1	Larger J-Box add-on for LED Backlit Panels, DLC Standard

**ORDERING INFORMATION**

CATALOG NUMBER	CARTON QTY.	EASY CODE	UPC
KT-BPLED40-24-835-VDIM	2	JNP-56	843654127774
KT-BPLED40-24-840-VDIM	2	MY-00	843654127781
KT-BPLED40-24-850-VDIM	2	DAF-26	843654127798

**CATALOG NUMBER BREAKDOWN**

# KT-BPLED40-24-8XX-VDIM

**1**   **2**   **3**   **4**   **5**   **6**   **7**   **8**

- 1** Keystone Technologies
- 2** Backlit Panel Light LED Fixture
- 3** Wattage
- 4** 2' x 4' Nominal Size
- 5** 800 Series
- 6** Color Temperature
- 7** 0-10V Dimming
- 8** Sensor Options

**8 Sensor Options**

	No option
/FC1-PIR	Occupancy sensor included