



ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS

KT-LED11.5BR40-8XX /G2

REPLACEMENT LAMP

DESCRIPTION

11.5W BR40 Lamp | 2700–5000K | >80 CRI | Standard Flood



| |
|---|
| LAMP TYPE: BR40 |
| BASE TYPE: E26 (Medium) |
| WATTAGE: 11.5W |
| COLOR TEMPERATURE: 2700–5000K |
| COLOR RENDERING INDEX (CRI): >80 |
| WARRANTY: 3 Years |
| RATED LIFE: 25,000 Hours |



TYPICAL APPLICATIONS

- Recessed downlights
- Track lighting
- Surface-mount ceiling fixtures

PRODUCT FEATURES


- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- Smooth, uniform dimming
- Smooth, diffused lens for comfortable glare-free performance
- Durable plastic housing lowers the risk for breakage
- Long life minimizes replacement and maintenance costs
- Suitable for use in damp and wet locations
- Operating temperature range –4°F/–20°C to 104°F/40°C
- PF >0.70
- ANSI compliant construction ensures fitment for intended applications
- UL Listed
- Meets Energy Star requirements
- Complies with Part 15 of FCC

ELECTRICAL AND PERFORMANCE SPECIFICATIONS

| Keystone Catalog Number | Description | Color Temp | Input Voltage | Rated Lamp Wattage | Legacy Equivalent Wattage | Base Type | Lumens | CRI | Beam Angle | Dimmable | Efficacy |
|-------------------------|-------------------------------------|------------|---------------|--------------------|---------------------------|-----------|---------|-----|------------|----------|----------|
| KT-LED11.5BR40-827 /G2 | BR40 bulb; Standard flood; Dimmable | 2700K | 120V | 11.5W | 75W halogen | E26 | 940 lm | >80 | 120° | Yes | 82 lm/W |
| KT-LED11.5BR40-830 /G2 | BR40 bulb; Standard flood; Dimmable | 3000K | 120V | 11.5W | 75 halogen | E26 | 940 lm | >80 | 120° | Yes | 82 lm/W |
| KT-LED11.5BR40-840 /G2 | BR40 bulb; Standard flood; Dimmable | 4000K | 120V | 11.5W | 75W halogen | E26 | 1000 lm | >80 | 120° | Yes | 87 lm/W |
| KT-LED11.5BR40-850 /G2 | BR40 bulb; Standard flood; Dimmable | 5000K | 120V | 11.5W | 75W halogen | E26 | 1000 lm | >80 | 120° | Yes | 87 lm/W |

KT-LED11.5BR40-8XX /G2 REPLACEMENT LAMP

PHYSICAL CHARACTERISTICS

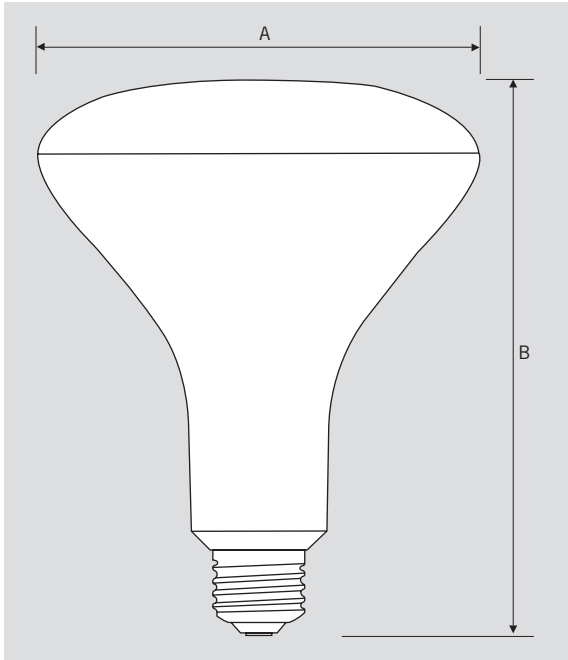

LAMP DIMENSIONS

| | |
|--------------|-------|
| A (Diameter) | 5.0" |
| B (Length) | 6.29" |

BASE TYPE: E26 (Medium)

PACKAGING

| | |
|-------------------|--------------------------|
| Carton Quantity | 24 pcs |
| Carton Dimensions | 15.16" × 15.16" × 19.88" |
| Carton Weight | 17.79 lbs |

ORDERING INFORMATION

| ORDER CODE | CARTON QUANTITY | ENERGY STAR UNIQUE ID | EASY CODE | UPC |
|------------------------|-----------------|-----------------------|-----------|--------------|
| KT-LED11.5BR40-827 /G2 | 24 pcs | 2382800 | AQY-95 | 843654134666 |
| KT-LED11.5BR40-830 /G2 | 24 pcs | 2382801 | OHE-49 | 843654134673 |
| KT-LED11.5BR40-840 /G2 | 24 pcs | 2382802 | UZY-38 | 843654134680 |
| KT-LED11.5BR40-850 /G2 | 24 pcs | 2382803 | TJC-96 | 843654134697 |

CATALOG NUMBER BREAKDOWN

KT-LED11.5BR40-8XX /G2

1 2 3 4 5 6 7

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 800 Series
- 6 Color Temperature
- 7 Generation 2