



KTLD-2LT5HO-UV-12C-VDIM /G2

CONSTANT CURRENT LED DRIVER FOR TYPE C T5HO LAMPS

DESCRIPTION

Constant Current Output | 120-277V Input | 0-10V Dimming

R







DRIVER TYPE: Constant Current

OUTPUT CURRENT: 0.27A × 2 Channels

INPUT POWER: 26W

MAX. CURRENT 0.25A@120V, 0.13A@277V

MAX. OUTPUT POWER: 23W

PRODUCT FEATURES

WARRANTY: 7 Years

- Compatible with Keystone external drive T5HO LED lamps
- Meets FCC Part 15 (Class B) consumer limits
- Short circuit overload and open load protection
- Type 1 outdoor, suitable for dry and damp locations
- UL8750 Recognized component
- Dimmable with 0−10V Dimmer, dim minimum 10%




- 85ºC/185ºF maximum case temperature
- Input frequency: 50/60 Hz
- THD: < 20%
- 70,000 hour timeline

ELECTRICAL SPECIFICATIONS

INPUT CHARACTERISTICS				OUTPUT CHARACTERISTICS			FEATURES
Input Voltage	Input Power	Power Factor	Max. Current	Max. Output Power	Max. Current	Output Voltage	Efficiency
120–277Vac	26W	>0.9	0.25A@120V 0.13A@277V	23W	0.27A × 2 Channels	36-45Vdc	88%

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH (L)	9.53"
WIDTH (W)	1.32"
HEIGHT (H)	1.10"

^{*}TC Point (85°C) is noted on each driver label






KTLD-2LT5HO-UV-12C-VDIM /G2

CONSTANT CURRENT LED DRIVER FOR TYPE C T5HO LAMPS


WIRING

DOUBLE-ENDED WIRING

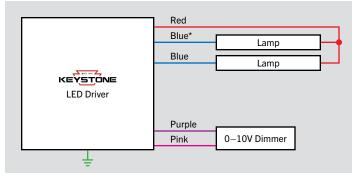

* For 1 lamp application, cap off 1 blue lead

SINGLE-ENDED WIRING

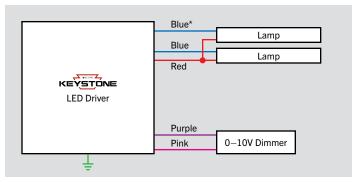

* For 1 lamp application, cap off 1 blue lead

STANDARD LEAD LENGTHS*

I	Black	30.00"	
Input	White	30.00"	
0	Red	30.00"	
Output	Blue	30.00"	
Dimmin	Purple	30.00"	
Dimming	Pink	30.00"	

Lead wires are 18 AWG 105º C/600V.

ORDERING INFORMATION

Order Code	Pack Quantity	UPC	Easy Code
KTLD-2LT5HO-UV-12C-VDIM/G2	25	843654141367	MZV-06

2 3 4 5

CATALOG NUMBER BREAKDOWN

KTLD-2LT5HO-UV-12C-VDIM /G2

- 1 Keystone Technologies LED Driver
- 2 Number of Lamps
- 3 Lamp Type
- 4 High Output
- 5 120-277V Input
- 6 Lamp Wattage
- 7 0-10V Dimming
- 8 Generation 2

^{*}Consult Keystone for special lead length requirements.