SYEAR



KT-EMRG-LED-12C-1200-EN CONSTANT WATTAGE LED EMERGENCY BACK-UP

(вс)

DESCRIPTION

LED Emergency Back-Up Driver | Standard Side Exit Wire Leads | 12W Output

DRIVER TYPE: Constant Wattage LED Emergency

MAX. OUTPUT POWER: 12W

INPUT VOLTAGE: 120–277Vac ±10%

OUTPUT VOLTAGE: 20~54Vdc

OUTPUT CURRENT: 600-250mA

SAFETY STANDARD: UL 924, Complies with CEC Title 20 Efficiency Standards

WARRANTY: 5 Years

ELECTRICAL SPECIFICATIONS



RoHS^{II} Compliant

Input voltage range120-277Vac ± 10%Frequency50/60HzPower factor> 0.9 under 120-277Vac inputInrush current20A @ 120VMax input current50mA @120V, 35mA @240V, and 30mA @277VTHD<20% under 120-277Vac inputOutput voltage0-60Vdc Class 2 compliantOutput power12W (constant)Turn-on Delay Time<1sOvershoot<10%
Power factor>0.9 under 120~277Vac inputInrush current20A @ 120VMax input current50mA @120V, 35mA @240V, and 30mA @277VTHD<20% under 120~277Vac input
Inrush current20A @ 120VMax input current50mA @120V, 35mA @240V, and 30mA @277VTHD<20% under 120~277Vac input
Max input current50mA @120V, 35mA @240V, and 30mA @277VTHD<20% under 120~277Vac input
THD<20% under 120~277Vac input
Output voltage 20-60Vdc Class 2 compliant Output current 600mA @ 20Vdc, 206mA @ 58Vdc Output power 12W (constant) Turn-on Delay Time <1s Overshoot <10%
Output current 600mA@20Vdc, 206mA@58Vdc Output power 12W (constant) Turn-on Delay Time <1s Overshoot <10%
Output power 12W (constant) Turn-on Delay Time <1s Overshoot <10%
Turn-on Delay Time <1s Overshoot <10%
Overshoot <10%
Ripple & Noise (pk-pk) <10%
Withstand voltage Input to output, 2800Vdc, 2mA
Leakage current Maximum 0.5mA at 277Vac, 60Hz input
Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. Protection Over current protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed.
Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.
Emergency Operation 90 minutes
BatteryHigh-temperature, maintenance-free, LiFePO4 battery, 9.6Vdc, 3 cell
Recharge Time 24 hours
Battery Charging Current 307mA

ENVIRONMENTAL SPECIFICATIONS

Operating temperature	0°C/32°F to 55°C/131°F		
Storage temperature	-20°C/-4°F to 55°C/131°F		
Humidity	5% to 95%		
MTBF	TBD		
Life rating	TBD		
Maximum ambient temperature	55°C/131°F for battery		

SAFETY AND EMC COMPLIANCE


UL/cUL	UL 924
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (consumer limit)
EN61000-3-2	Harmonic current emissions Class C

Page 2 of 3




KT-EMRG-LED-12C-1200-EN CONSTANT WATTAGE LED EMERGENCY BACK-UP

PHYSICAL SPECIFICATIONS

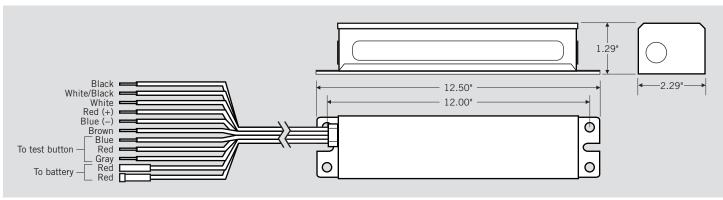

WIRING SPECIFICATIONS

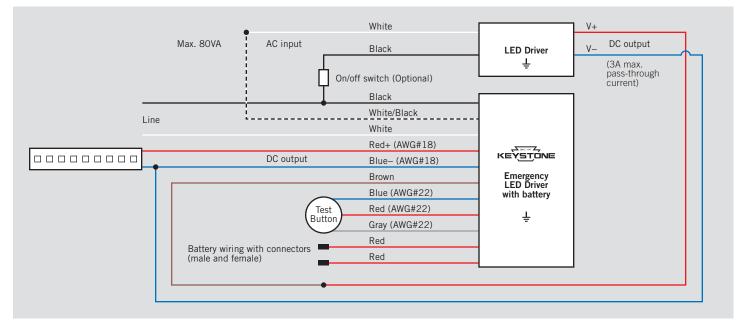



KT-EMRG-LED-12C-1200-EN CONSTANT WATTAGE LED EMERGENCY BACK-UP

ORDERING INFORMATION

ORDER CODE	DESCRIPTION	PACKAGING STYLE	PACK QUANTITY	ITEM STATUS
KT-EMRG-LED-12C-1200-EN-IP	1-Piece LED Emergency Back-up with Standard Side Exit Leads	Individually Packaged	1	Active

CATALOG NUMBER BREAKDOWN

KT-EMRG-LED-12C-1200-EN-IP

1	2	2	1	5	6	7
1	2	3		9	0	

- **1** Keystone Technologies
- 2 Emergency Back-up Driver
- 3 LED Driver
- 4 Wattage Family (CEC Compliant)
- **5** Nominal Lumen Output
- 6 1-Piece Enclosure
- 7 Packaging Style