




### KT-LED10.5T8-48GC-8XX-D-VDIM T8 LED LAMP

#### **DESCRIPTION**

10.5W T8 LED | 3500-5000K | > 83 CRI | High-Efficiency | Single-Ended Wiring



















#### **PRODUCT FEATURES**

WARRANTY: 10 Years


- Replacement for conventional F32T8 fluorescent lamp
- Single-ended wiring
- Instant startup
- Frosted lens eliminates pixelation
- Improved lamp durability with shatterproof coated glass
- Integral driver (isolated) eliminates the need for external driver or
- Approximately 40% more energy efficient than standard F32T8 lamps
- ETL Sanitation Listed NSF/ANSI Standard 2 Food equipment

- 0-10V dimming to below 10%
- Environmentally friendly: No mercury used
- Operating temperature: -20°C/-4°F to 45°C/113°F
- 50,000+ hour lifetime
- UL Classified
- DLC Listing; Meets DLC 5.1 requirements
- Lamp is dimmable when used with an appropriate dimming accessory (purchased separately). Contact Keystone for more details to find out what is best for the intended application

#### PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Input Current	Wattage	<b>Color Temperature</b>	Lumen Output	Efficacy	CRI	Power Factor
KT-LED10.5T8-48GC-835-D-VDIM		0.12A @ 120V; 0.05A @ 277V	10.5W	3500K	1650	157 lm/W	>83	>0.9
KT-LED10.5T8-48GC-840-D-VDIM	120-277V			4000K	1700	162 lm/W		
KT-LED10.5T8-48GC-850-D-VDIM				5000K	1700	162 lm/W		

#### **OPERATING SPECIFICATIONS**

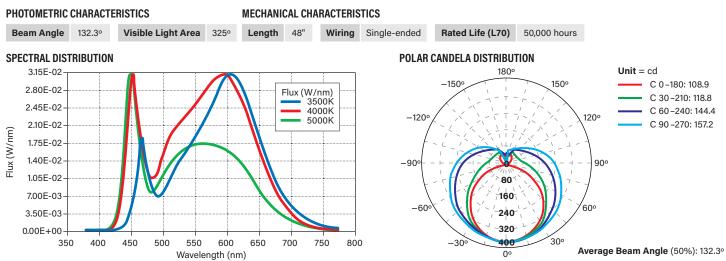






## KT-LED10.5T8-48GC-8XX-D-VDIM


#### WIRING DIAGRAMS

Cut all existing connections to ballast as shown below and remove ballast.

Note: Both single-ended wiring wthout dimming and single-ended wiring wth dimming require non-shunted lampholders.

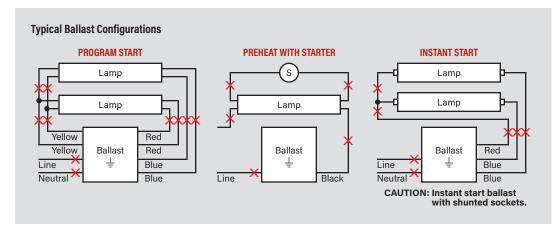

Single-ended wiring without dimming: Re-wire fixture as shown below.

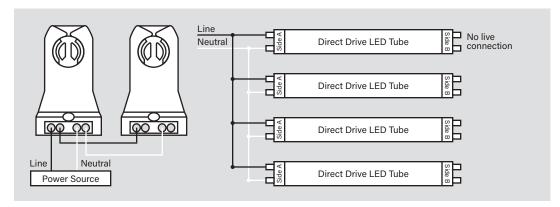

Single-ended wiring with dimming: Re-wire fixture as shown below.

# TYPICAL NON-SHUNTED LAMPHOLDER

#### CAUTION: USE ONLY NON-SHUNTED LAMPHOLDERS.


Connect wires directly

to these terminals

Do not install product in a fixture with shunted lampholders (found in all fixtures using instant start ballasts). If the current lampholders are shunted, remove them and replace them with non-shunted lampholders. Make new connections directly to terminals as indicated in wiring diagrams.

Keystone can provide any style replacement lampholders.

Call us at 800-464-2680.

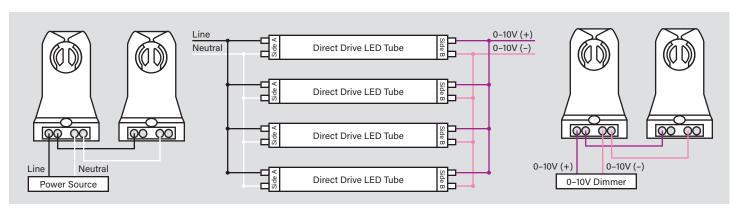


Note: There should not be any exposed wires at the end of installation.





## KT-LED10.5T8-48GC-8XX-D-VDIM T8 LED LAMP

#### PHYSICAL CHARACTERISTICS

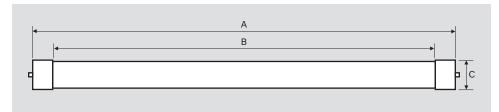

#### LAMP DIMENSIONS

A (Body Length)	47.15"		
B (Illuminated Length)	42.63"		
C (Diameter)	1.10"		

**NOMINAL LENGTH: 48"** 

BASE TYPE: G13 (Medium Bi-Pin)

#### **ORDERING INFORMATION**

ORDER CODE	CARTON QUANTITY	UPC	EASY CODE	DLC PRODUCT ID
KT-LED10.5T8-48GC-835-D-VDIM	25	843654136462	FSE-77	PXC9MTR3
KT-LED10.5T8-48GC-840-D-VDIM	25	843654136479	GMF-80	POYSPU7Z
KT-LED10.5T8-48GC-850-D-VDIM	25	843654136486	OOS-72	PU2SYGIQ

#### **CATALOG NUMBER BREAKDOWN**

## KT-LED10.5T8-48GC-8XX-D-VDIM

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Type
- 5 Nominal Length (Inches)
- **6** Coated Glass
- 7 >80 CRI
- **8** Color Temperature
- 9 Direct Drive Series
- **10** 0-10V Dimming