



KTAT-70-480-277

STEP DOWN AUTO-TRANSFORMER



DESCRIPTION

Keystone's 480V to 277V Step-Down Auto-Transformers are designed to step down 480V to 277V single-phase power. These transformers enable consumers to utilize common universal voltage (120-277V) electronic ballasts in applications where the main facility power is 480V.

INPUT VOLTAGE: 480 or 347VAC \pm 10%
INPUT FREQUENCY: 50/60 Hz
MAXIMUM POWER: 70 (VA) for 480V Applications 70 (VA) for 347V Applications
WARRANTY: 5 Years


PRODUCT FEATURES

- Non-Isolated Autotransformer
- Sound Rated A
- 5 Year Limited Warranty
- For Use with T5, T8, LED, CFL, or Electronic HID Ballast Operating at 277V Input Voltage
- Insulation Rating: 180°C Class H
- UL and cUL 5085 Approved
- Thermally Protected

ELECTRICAL SPECIFICATIONS


INPUT CHARACTERISTICS			OUTPUT CHARACTERISTICS		
Input Voltage	Input Current at Max Load	Input Current at No Load	Output Voltage	Maximum Load	Maximum Output Current
480V	0.16A	0.06A	277V	70	0.25A
347V	0.22A	0.08A	277V	70	0.25A

WIRING DIAGRAM

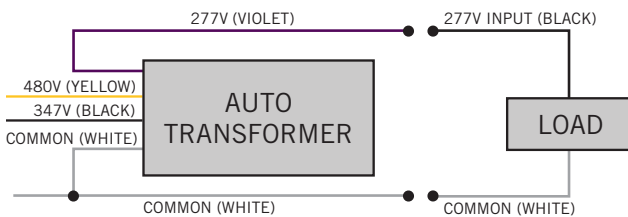

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	4.76"
WIDTH	2.15"
HEIGHT	1.61"
MOUNTING	2.00"
CASE STYLE	AK6

STANDARD LEAD LENGTHS*

BLACK	8"
YELLOW	8"
WHITE	8"
VIOLET	8"

*Consult Keystone for special lead length requirements.



KTAT-70-480-277

STEP DOWN AUTO-TRANSFORMER

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTAT-70-480-277-CP	Carton Pack	24	Quick Ship

CATALOG NUMBER BREAKDOWN

KTAT-70-480-277-CP

Keystone Technologies Auto-Transformer
Max. Power (VA)
Input Voltage
Output Voltage
Packaging Style